

0.75W - 7000K


Specifications Chart

	Part Number
	V07W2TW B
Color Temperature	7000K
LED/MOD	2
MOD/FT	2
Lumens/Mod	65
Lumens/Ft	130
Lumens/watt	85
Beam Angle	160
Power consumption (watt)	0.75W
Input Voltage	DC 12V
Operating Temperature	-30° C to +60° C
IP level	67
Packaging	
Anti-Static Bag	72 Modules
Carton	864 Modules
Master Carton	1728 Modules
Warranty	3 years


Power Supply Loading Information

Part Number	Wattage	Number of Modules	Number of Feet
CV122-120-277	24	28	14
CV125-120	60	72	36
CV125-120-277	60	72	36
CV12125-MV	2X60	144	72
CVW125-MV	60	72	36

Distance to Power Supply	Stranded Copper Wire Gauge	Expected Voltage Drop
13 feet	16 AWG	5%
20 feet	14 AWG	5%
30 feet	12 AWG	5%

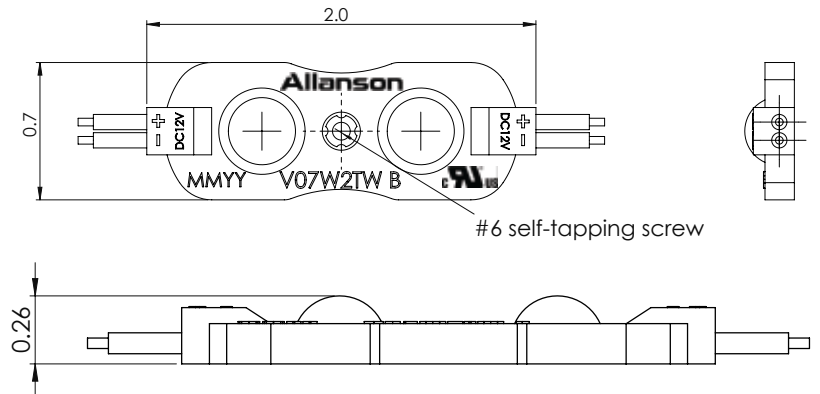

Modules Population Recommendation

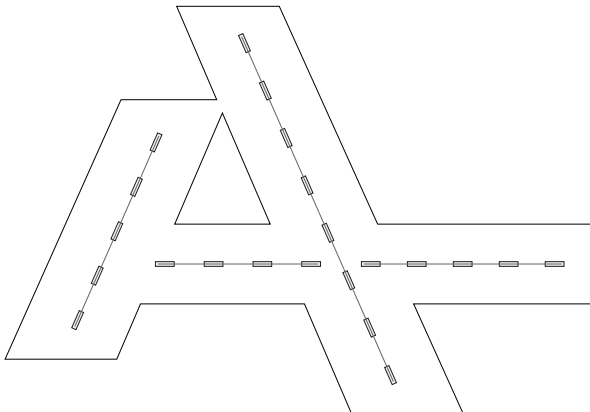

Recommended Depth 2 modules/foot	Stroke Spacing Range
4 inches	6 inch
6 inches	9 inches
8 inches	10 inches

Results may vary based on sign face material, graphics, and desired brightness.

For all your population services and estimations, please send .ai or .eps files to led@allanson.com.